



# BIGFOOT GAS G-1500

- Gasoline powered
- 18 mph (29 km/h) speed
- 100 mi (161 km) range



## ERGONOMIC COMFORT & VEHICLE PERFORMANCE



Taylor-Dunn's BIGFOOT provides maximum comfort with the large operator's compartment, tilt steering, contoured sliding adjustable seats, which increases legroom and reduces operator fatigue.

This gas-powered vehicle will take you the distance, up to 100 miles, and at speeds up to 18 miles per hour.

Additional standard features include, hydraulic disc brakes, recessed tie-downs, and 12 gauge smooth skin unitized steel body.

Visit our website for additional vehicle images, videos, information and custom modifications at [www.taylor-dunn.com](http://www.taylor-dunn.com).

<b>ENERGY</b>	Gasoline powered	
<b>SPEED</b>	up to 18 mph	up to 29 km/h
<b>RANGE</b>	100 mi	161 km
<b>LOAD CAPACITY</b>	up to 1,500 lb	680 kg
<b>BED SIZE (W x L)</b>	44x77 in	112x196 cm
<b>TURNING RADIUS</b>	137 in	348 cm

**\* Based on Standard Configuration**

Typical Capacity: Actual load capacity depends on application and vehicle configuration.

### FEATURES & BENEFITS:

- Large Operator's Compartment
- Tilted Steering
- Adjustable Seats



Ample Foot Room



Adjustable Seats



LED Lighting



Recessed Tie-downs



Large Compartment



Left Foot Rest




Tilted Steering






## PERFORMANCE

<b>LOAD CAPACITY</b>	1,500 lb	680 kg
<b>TOW CAPACITY</b>	5,000 lb	2268 kg
<b>MAX SPEED (UNLOADED)</b>	18 mph	29 km/h
<b>TURNING RADIUS</b>	137 in	348 cm



## DIMENSIONS

<b>OVERALL LENGTH</b>	130.5 in	332 cm
<b>OVERALL WIDTH</b>	44.5 in	113 cm
<b>HEIGHT (- cab)</b>	50 in	127 cm
<b>HEIGHT (+ cab)</b>	74 in	188 cm
<b>WHEEL BASE</b>	62 in	158 cm
<b>GROUND CLEARANCE</b>	4 in	10 cm
<b>BED SIZE</b>	44 x 77 in	112 x 196 cm

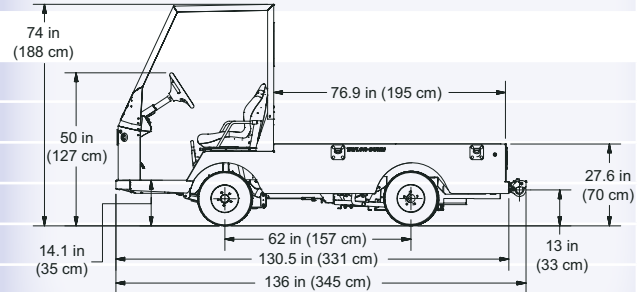

## POWER SUPPLY / DRIVE TRAIN

<b>MOTOR</b>	19 hp, four-stroke, gasoline
<b>TRANSMISSION</b>	Continuous variable pitch V-belt to forward and reverse gearbox
<b>CLUTCH</b>	Automatic centrifugal engagement
<b>DIFFERENTIAL</b>	Bevel gear, 13.87:1 axle ratio
<b>BATTERIES</b>	12V, 61 amp-hour
<b>CHARGING SYSTEM</b>	20 amp flywheel alternator
<b>STARTER</b>	12V electric with electronic ignition
<b>GOVERNOR</b>	Oil bath flywheel

## CHASSIS

<b>FRAME</b>	Fully welded, unitized, 12 gauge, smooth skin steel body
<b>STEERING</b>	Rack and pinion
<b>SUSPENSION</b>	Multi-leaf springs, front and rear
<b>BRAKES</b>	All wheel hydraulic disc brakes with hand-operated parking brake
<b>BUMPERS</b>	Heavy duty steel integrated front & rear
<b>TIRES</b>	5.70 x 8, load range C, pneumatic

## GENERAL

<b>UNIT WEIGHT</b>	1410 lb (640 kg)
<b>FUEL</b>	9 U.S. gallons (34 liters)
<b>SEATS</b>	Black adjustable bucket seats, driver's seat electrical interlock, 2 person
<b>INSTRUMENTATION</b>	Ignition starter, hour meter, low oil indicator, fuel gauge, reverse buzzer, light switch, and electric horn
<b>LIGHT ACCESSORIES</b>	Dual LED headlights, taillights and brake lights, reverse lights, marker lights
<b>CONFORMANCE</b>	Type G OSHA 1910.178, ANSI B56.8

## OPTIONS

- FOLD-AWAY SEATS
- ALUMINUM DROP-DOWN SIDES
- WINDSHIELD WIPERS
- STAKE SIDES
- ECONO CAB
- VARIOUS HITCHES
- LADDER RACK
- VINYL DOORS
- UNDERCOATING
- STROBE LIGHT
- LOCKABLE CARGO BOX
- GALVANIZED FRAME
- DIAMOND PLATE DECK
- DIRECTIONAL SIGNALS
- OPTIONAL PAINT COLORS

Specifications, standard equipment, accessories and modifications are subject to change without notice.